



Removal of E2Session and use of the RNIB instead

- It is suggested to use the same entities.NodeblInfo we currently use instead of using a new structure under a different key.
- The setup response handlers (x2/endc positive and negative) shall retrieve the entry from the rNib using the value of MEID (and not the xaction).
- The prehandlers (as of now) shall attempt to retrieve an entry from the rNib before saving an entry in the rNib.
- Need to replace the use of the E2Session in the UT with rnib mock.
- ExecuteSetup() puts information in the E2Session - no need (Idan & Irina are going to take care of the prehandlers setup response handlers)

Replace E2Sessions with RNIB /HTTP request

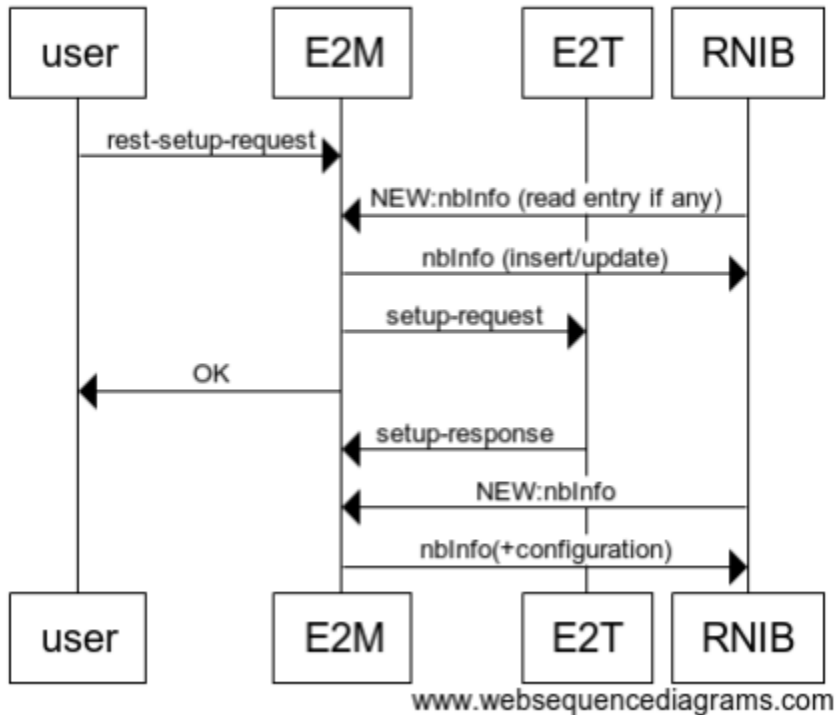

Replace E2Sessions with RNIB /recovery#1

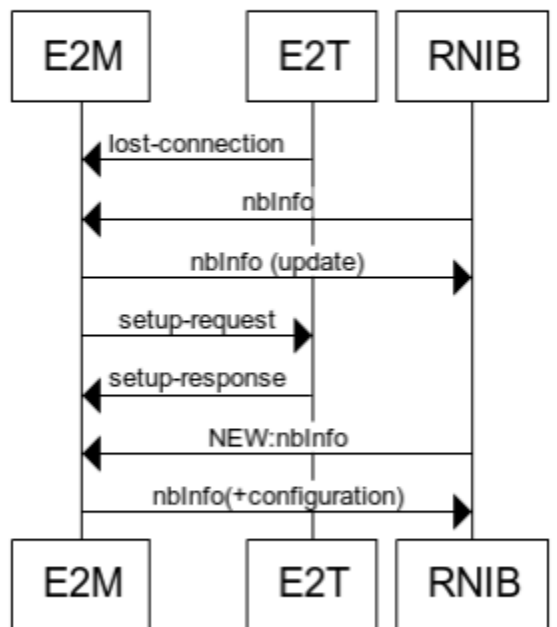

Replace E2Sessions with RNIB /recovery#2

