

# Getting Started /Sample test process

This doc describes how to install and deploy INF bare metal All-in-one Duplex deployment configuration on two HP ProLiant DL380p Gen8 servers.

## 1 Installation for the first server from the O-RAN INF ISO image

- The INF ISO image can be downloaded from [inf-image-aio-installer-intel-corei7-64.iso](#) or build yourself from source
  - Please see the [Developer-Guide](#) file for how to build the image.
  - The Image is a live ISO image with CLI installer

### 1.1 Burn the image to the USB device

- Assume the the usb device is /dev/sdX here
- `$ sudo dd if=/path/to/inf-image-aio-installer-intel-corei7-64.iso of=/dev/sdX bs=1M`

### 1.2 Install the first server (controller-0)

- Reboot the target from the USB device.

**Boot Order**

Virtual Floppy/USB key: None  
Virtual CD/DVD-ROM: None

**Server Boot Order**

Hard Disk Drive  
Network Device 1  
CD/DVD Drive  
Floppy Drive  
USB Storage Device


Up    Down    Apply

**One-Time Boot Status**

Current One-Time Boot Option: USB Storage Device  
Select One-Time Boot Option:

**Additional Options**

- Select "All-in-one Graphics console" or "All-in-one Serial console install" and press ENTER

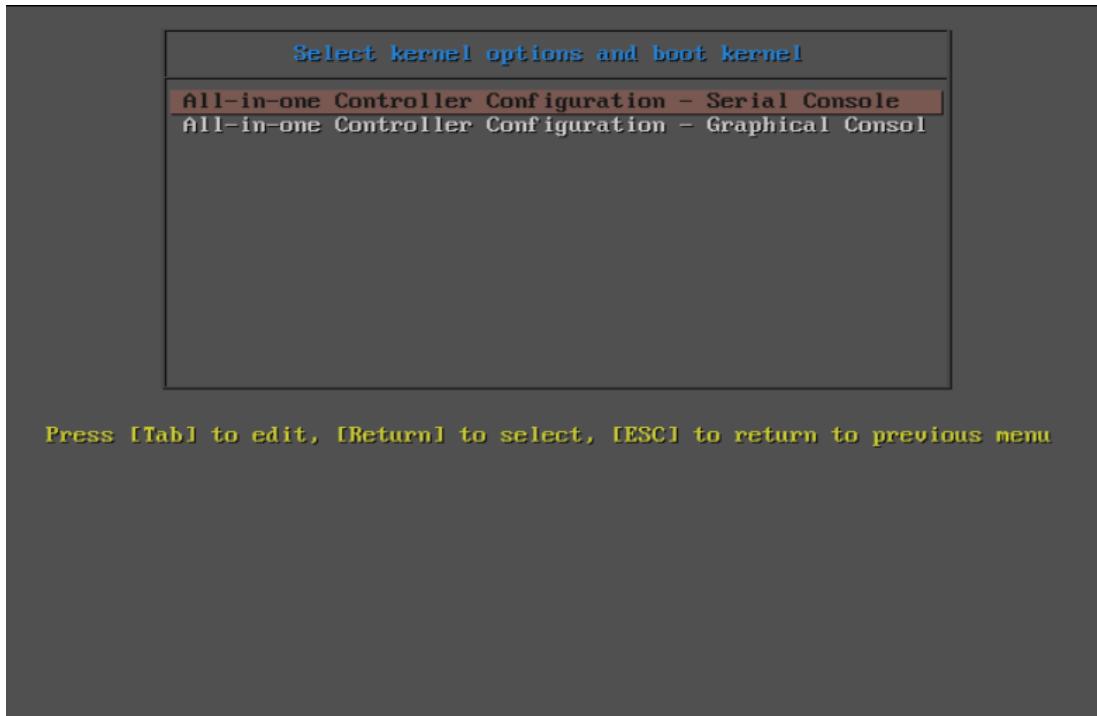

- Start the auto installation

```
Starting Anaconda
Starting installer, one moment...
anaconda 28.22.11-1 for OpenEmbedded nodistro.0 started.
* installation log files are stored in /tmp during the installation
* shell is available on TTY2 and in second TMUX pane (ctrl+b, then press 2)
* if the graphical installation interface fails to start, try again with the
  inst.text boootoption to start text installation
* when reporting a bug add logs from /tmp as separate text/plain attachments
07:26:25 Running pre-installation scripts
07:26:25 Running pre-installation scripts
07:26:32 Not asking for VNC because of an automated install
07:26:32 Not asking for VNC because of an automated install
07:26:32 Not asking for VNC because text mode was explicitly asked for in kickstart
07:26:32 Not asking for VNC because text mode was explicitly asked for in kickstart
Starting automated install.....
```

```
=====
Progress

.
Setting up the installation environment
.
Configuring storage
..
Creating ext4 on /dev/sda4
Creating lvm_pv on /dev/sda5
Creating ext4 on /dev/mapper/cgts--vg-scratch--lv
Creating ext4 on /dev/mapper/cgts--vg-log--lv
Creating ext4 on /dev/sda3
Creating biosboot on /dev/sda1
..
Running pre-installation scripts
.
Discovering realm to join
.
Running pre-installation tasks
....
Installing.
Starting package installation process
Downloading packages
```

```
Installing libxml2-dev.corei7_64 (3503/5648)
Installing packagegroup-core-lsb-perl.noarch (3504/5648)
Installing packagegroup-core-full-cmdline-extended.noarch (3505/5648)
Installing kernel-module-xt-tee-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3506/5648)
Installing kernel-module-nfcmrvl-spi-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3507/5648)
Installing kernel-module-8021q-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3508/5648)
Installing packagegroup-base-wifi.intel_corei7_64 (3509/5648)
Installing kernel-module-vfio-mdev-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3510/5648)
Installing kernel-module-fakelb-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3511/5648)
Installing kernel-module-drbd-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3512/5648)
Installing kernel-module-osd-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3513/5648)
Installing kernel-module-ahci-platform-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3514/5648)
Installing kernel-module-cmtp-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3515/5648)
Installing kernel-module-amdgpu-5.0.19-rt11-yocto-preempt-rt.corei7_64_intel_common (3516/5648)
```

```
Verifying xorgproto-dev.corei7_64 (5642/5648)
Verifying xprop.corei7_64 (5643/5648)
Verifying xtrans-dev.corei7_64 (5644/5648)
Verifying xz.corei7_64 (5645/5648)
Verifying xz-dev.corei7_64 (5646/5648)
Verifying zeromq.corei7_64 (5647/5648)
Verifying zip.corei7_64 (5648/5648)

.
Configuring storage

.
Installing boot loader

.
Performing post-installation setup tasks


.

Configuring installed system
.....
Writing network configuration
.

Creating users
.....
Configuring addons
.

Generating initramfs
```

- It will reboot automatically after installation

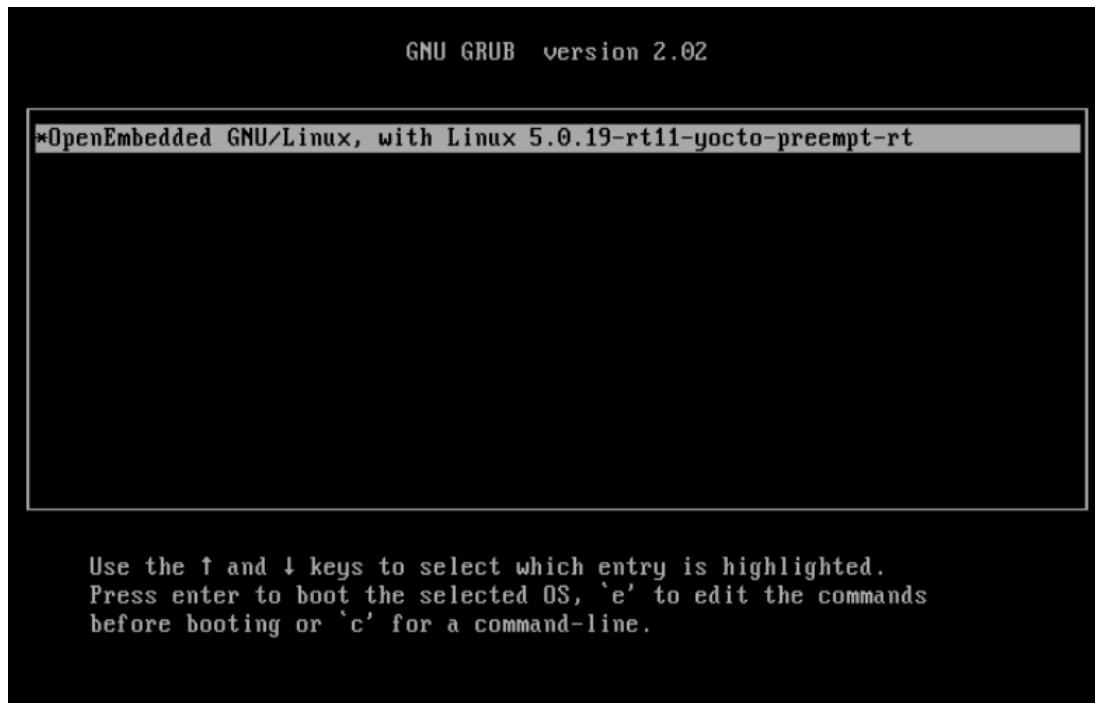

```
Booting 'OpenEmbedded GNU/Linux, with Linux 5.0.19-rt11-yocto-preempt-rt'

Loading Linux 5.0.19-rt11-yocto-preempt-rt ...
Loading initial ramdisk ...
early console in extract_kernel
input_data: 0x00000000026a13b1
input_len: 0x000000000a459e1
output: 0x0000000001000000
output_len: 0x00000000020b5e18
kernel_total_size: 0x000000000202c000
trampoline_32bit: 0x0000000000091000
booted via startup_32()
Physical KASLR using RDTSC...
Virtual KASLR using RDTSC...

Decompressing Linux... Parsing ELF... Performing relocations... done.
Booting the kernel.
```

```
Release E-Release (5.0) localhost tty1
-----
WARNING *** WARNING *** WARNING *** WARNING ***
-----
THIS IS A PRIVATE COMPUTER SYSTEM.
This computer system including all related equipment, network devices
(specifically including Internet access), are provided only for authorized use.
All computer systems may be monitored for all lawful purposes, including to
ensure that their use is authorized, for management of the system, to
facilitate protection against unauthorized access, and to verify security
procedures, survivability and operational security. Monitoring includes active
attacks by authorized personnel and their entities to test or verify the
security of the system. During monitoring, information may be examined,
recorded, copied and used for authorized purposes. All information including
personal information, placed on or sent over this system may be monitored. Uses
of this system, authorized or unauthorized, constitutes consent to monitoring
of this system. Unauthorized use may subject you to criminal prosecution.
Evidence of any such unauthorized use collected during monitoring may be used
for administrative, criminal or other adverse action. Use of this system
constitutes consent to monitoring for these purposes.

localhost login:
```

## 2 Configuration and initialize the bootstrap

### 2.1 First Login with "sysadmin/sysadmin" and change password

THIS IS A PRIVATE COMPUTER SYSTEM.  
This computer system including all related equipment, network devices (specifically including Internet access), are provided only for authorized use. All computer systems may be monitored for all lawful purposes, including to ensure that their use is authorized, for management of the system, to facilitate protection against unauthorized access, and to verify security procedures, survivability and operational security. Monitoring includes active attacks by authorized personnel and their entities to test or verify the security of the system. During monitoring, information may be examined, recorded, copied and used for authorized purposes. All information including personal information, placed on or sent over this system may be monitored. Uses of this system, authorized or unauthorized, constitutes consent to monitoring of this system. Unauthorized use may subject you to criminal prosecution. Evidence of any such unauthorized use collected during monitoring may be used for administrative, criminal or other adverse action. Use of this system constitutes consent to monitoring for these purposes.

```
localhost login: sysadmin
Password:
You are required to change your password immediately (administrator enforced)
Changing password for sysadmin.
Current password:
New password:
Retype new password:
localhost:~$ _
```

## 2.2 Set OAM network before bootstrap

```
export OAM_DEV=eno3
export CONTROLLER0_OAM_CIDR=128.224.210.110/24
export DEFAULT_OAM_GATEWAY=128.224.210.1
sudo ip address add $CONTROLLER0_OAM_CIDR dev $OAM_DEV
sudo ip link set up dev $OAM_DEV
sudo ip route add default via $DEFAULT_OAM_GATEWAY dev $OAM_DEV
```

## 2.3 Login the server through SSH with "sysadmin"

### 2.4 Prepare the localhost.yml for bootstrap

```
cat << EOF > localhost.yml
system_mode: duplex
management_subnet: 192.168.18.0/24
management_start_address: 192.168.18.2
management_end_address: 192.168.18.50
management_gateway_address: 192.168.18.1
external_oam_subnet: 128.224.210.0/24
external_oam_gateway_address: 128.224.210.1
external_oam_floating_address: 128.224.210.110
external_oam_node_0_address: 128.224.210.111
external_oam_node_1_address: 128.224.210.112
EOF
```

## 2.5 Run the ansible bootstrap

```
ansible-playbook /usr/share/ansible/stx-ansible/playbooks/bootstrap.yml -vvv
```

After the bootstrap successfully finish, it will show as following:

```
PLAY RECAP ****
localhost : ok=257  changed=151  unreachable=0    failed=0     skipped=214  rescued=0    ignored=0
```

## 2.6 Congigure controller-0

- Acquire admin credentials:

```
source /etc/platform/openrc
```

```
controller-0:~$ source /etc/platform/openrc
[sysadmin@controller-0 ~(keystone_admin)]$
```

- Configure the OAM and MGMT interfaces of controller-0 and specify the attached networks:

```
OAM_IF=eno3
```

```
MGMT_IF=eno1
```

```
system host-if-modify controller-0 lo -c none
```

```
[sysadmin@controller-0 ~(keystone_admin)]$ OAM_IF=eno3
[sysadmin@controller-0 ~(keystone_admin)]$ MGMT_IF=eno1
[sysadmin@controller-0 ~(keystone_admin)]$ system host-if-modify controller-0 lo -c none
+-----+-----+
| Property      | Value          |
+-----+-----+
| ifname        | lo             |
| iftype         | virtual        |
| ports          | []             |
| imac           | 00:00:00:00:00:00 |
| imtu           | 1500           |
| ifclass        | None           |
| aemode         | None           |
| schedpolicy    | None           |
| txhashpolicy   | None           |
| uuid           | 08c95952-892b-40b5-b17a-7d2ad46e725c |
| ihost_uuid     | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id        | None           |
| uses           | []             |
| used_by        | []             |
| created_at     | 2020-11-17T00:30:45.265032+00:00 |
| updated_at     | 2020-11-17T01:03:39.031612+00:00 |
| sriov_numvfs   | 0              |
| sriov_vf_driver| None           |
+-----+-----+
```

```
IFNET_UUIDS=$(system interface-network-list controller-0 | awk '{if ($6=="lo") print $4;}' )
```

```
for UUID in $IFNET_UUIDS; do
```

```
    system interface-network-remove ${UUID}
```

done

```
[sysadmin@controller-0 ~]# IFNET_UUIDS=$(system interface-network-list controller-0 | awk '{if ($6=="lo") print $4;}')
[sysadmin@controller-0 ~]# for UUID in $IFNET_UUIDS; do
>     system interface-network-remove ${UUID}
> done
Deleted Interface Network: 0bf11f1b-4fc6-4e97-b896-3d6393a3744e
Deleted Interface Network: a62d95f6-ad4e-4779-bfc0-6a885067f8d8
```

system host-if-modify controller-0 \$OAM\_IF -n oam0

```
[sysadmin@controller-0 ~]# system host-if-modify controller-0 $OAM_IF -n oam0
+-----+-----+
| Property      | Value          |
+-----+-----+
| ifname        | oam0           |
| iftype        | ethernet       |
| ports         | [u'eno3']      |
| imac          | 24:6e:96:5d:0c:b2 |
| imtu          | 1500           |
| ifclass       | None            |
| aemode        | None            |
| schedpolicy   | None            |
| txhashpolicy  | None            |
| uuid          | d8a048fa-67ef-43ac-8166-671be93caa30 |
| ihost_uuid    | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id       | None            |
| uses          | []              |
| used_by       | []              |
| created_at    | 2020-11-17T00:28:32.365863+00:00 |
| updated_at    | 2020-11-17T01:03:45.090904+00:00 |
| sriov_numvfs  | 0               |
| sriov_vf_driver | None           |
| accelerated   | [True]          |
+-----+-----+
```

system host-if-modify controller-0 \$MGMT\_IF -n pxeboot0

```
[sysadmin@controller-0 ~ (keystone_admin)]$ system host-if-modify controller-0 $MGMT_IF -n pxeboot0
+-----+
| Property      | Value          |
+-----+
| ifname        | pxeboot0       |
| iftype         | ethernet       |
| ports          | [u'eno1']       |
| imac           | 24:6e:96:5d:0c:92 |
| imtu           | 1500           |
| ifclass        | None            |
| aemode         | None            |
| schedpolicy    | None            |
| txhashpolicy   | None            |
| uuid           | 23b5e923-1e53-4e70-a975-542d8380b7f2 |
| ihost_uuid     | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id        | None            |
| uses           | []              |
| used_by        | []              |
| created_at     | 2020-11-17T00:28:32.612230+00:00 |
| updated_at     | 2020-11-17T01:03:47.341003+00:00 |
| sriov_numvfs   | 0               |
| sriov_vf_driver| None            |
| accelerated    | [True]          |
+-----+
```

```
system host-if-modify controller-0 oam0 -c platform
```

```
[sysadmin@controller-0 ~]# system host-if-modify controller-0 oam0 -c platform
+-----+-----+
| Property | Value |
+-----+-----+
| ifname   | oam0 |
| iftype   | ethernet |
| ports    | [u'eno3'] |
| imac     | 24:6e:96:5d:0c:b2 |
| imtu     | 1500 |
| ifclass  | platform |
| aemode   | None |
| schedpolicy | None |
| txhashpolicy | None |
| uuid     | d8a048fa-67ef-43ac-8166-671be93caa30 |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id  | None |
| uses     | [] |
| used_by  | [] |
| created_at | 2020-11-17T00:28:32.365863+00:00 |
| updated_at | 2020-11-17T01:03:49.368879+00:00 |
| sriov_numvfs | 0 |
| sriov_vf_driver | None |
| accelerated | [True] |
+-----+-----+
```

system interface-network-assign controller-0 oam0 oam

```
[sysadmin@controller-0 ~]# system interface-network-assign controller-0 oam0 oam
+-----+-----+
| Property | Value |
+-----+-----+
| hostname | controller-0 |
| uuid     | 3c8bd181-d3f3-4e14-8e89-75a3432db1e4 |
| ifname   | oam0 |
| network_name | oam |
+-----+-----+
```

system host-if-modify controller-0 pxeboot0 -c platform

```
[sysadmin@controller-0 ~]# system host-if-modify controller-0 pxeboot0 -c platform
+-----+-----+
| Property | Value   |
+-----+-----+
| ifname   | pxeboot0 |
| iftype   | ethernet |
| ports    | [u'eno1'] |
| imac     | 24:6e:96:5d:0c:92 |
| imtu     | 1500    |
| ifclass  | platform |
| aemode   | None    |
| schedpolicy | None |
| txhashpolicy | None |
| uuid     | 23b5e923-1e53-4e70-a975-542d8380b7f2 |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id  | None    |
| uses     | []      |
| used_by  | []      |
| created_at | 2020-11-17T00:28:32.612230+00:00 |
| updated_at | 2020-11-17T01:03:53.143795+00:00 |
| sriov_numvfs | 0      |
| sriov_vf_driver | None |
| accelerated | [True]  |
+-----+-----+
```

system interface-network-assign controller-0 pxeboot0 pxeboot

```
[sysadmin@controller-0 ~]# system interface-network-assign controller-0 pxeboot0 pxeboot
+-----+-----+
| Property | Value   |
+-----+-----+
| hostname | controller-0 |
| uuid     | 6c55622d-2da4-4f4e-ab5e-f8e06e03af7c |
| ifname   | pxeboot0 |
| network_name | pxeboot |
+-----+-----+
```

system host-if-add -V 18 controller-0 mgmt0 vlan pxeboot0

```
[sysadmin@controller-0 ~ (keystone_admin)]$ system host-if-add -V 18 controller-0 mgmt0 vlan pxeboot0
+-----+-----+
| Property | Value |
+-----+-----+
| ifname   | mgmt0 |
| iftype   | vlan  |
| ports    | []    |
| imac     | 24:6e:96:5d:0c:92 |
| imtu     | 1500  |
| ifclass  | None   |
| aemode   | None   |
| schedpolicy | None |
| txhashpolicy | None |
| uuid     | 119bdb85-1e24-44ff-b527-fe8f167b0ad3 |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id  | 18    |
| uses     | [u'pxeboot0'] |
| used_by  | []    |
| created_at | 2020-11-17T01:03:57.303000+00:00 |
| updated_at | None   |
| sriov_numvfs | 0    |
| sriov_vf_driver | None |
| accelerated | [True] |
+-----+-----+
```

system interface-network-assign controller-0 mgmt0 mgmt

```
[sysadmin@controller-0 ~ (keystone_admin)]$ system interface-network-assign controller-0 mgmt0 mgmt
+-----+-----+
| Property | Value |
+-----+-----+
| hostname | controller-0 |
| uuid     | 2e93ef03-e9ee-457a-8667-05b52b7109a5 |
| ifname   | mgmt0 |
| network_name | mgmt |
+-----+-----+
```

system host-if-add -V 19 controller-0 cluster0 vlan pxeboot0

```
[sysadmin@controller-0 ~(keystone_admin)]$ system host-if-add -V 19 controller-0 cluster0 vlan pxeboot0
+-----+-----+
| Property | Value |
+-----+-----+
| ifname   | cluster0 |
| iftype   | vlan    |
| ports    | []      |
| imac     | 24:6e:96:5d:0c:92 |
| imtu     | 1500   |
| ifclass  | None    |
| aemode   | None    |
| schedpolicy | None |
| txhashpolicy | None |
| uuid     | 6a620c8e-4f7b-4f74-a9f4-2a91d3ae9756 |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| vlan_id  | 19     |
| uses     | [u'pxeboot0'] |
| used_by  | []      |
| created_at | 2020-11-17T01:04:02.613518+00:00 |
| updated_at | None    |
| sriov_numvfs | 0    |
| sriov_vf_driver | None |
| accelerated | [True] |
+-----+-----+
```

system interface-network-assign controller-0 cluster0 cluster-host

```
[sysadmin@controller-0 ~(keystone_admin)]$ system interface-network-assign controller-0 cluster0 cluster-host
+-----+-----+
| Property | Value |
+-----+-----+
| hostname | controller-0 |
| uuid     | fb8b6be6-1618-4662-b063-b1e8d340aa48 |
| ifname   | cluster0 |
| network_name | cluster-host |
+-----+-----+
```

- Configure NTP Servers for network time synchronization:

system ntp-modify ntpservers=0.pool.ntp.org,1.pool.ntp.org

```
[sysadmin@controller-0 ~]# system ntp-modify ntpservers=0.pool.ntp.org,1.pool.ntp.org
+-----+
| Property | Value |
+-----+
| uuid | 3206cf01-c64a-457e-ac66-b8224c9684c3 |
| ntpservers | 0.pool.ntp.org,1.pool.ntp.org |
| isystem_uuid | cc79b616-d24e-4432-a953-85c9b242cb3a |
| created_at | 2020-11-17T00:27:23.529571+00:00 |
| updated_at | None |
+-----+
```

Then check the interfaces status

```
[sysadmin@controller-0 ~]# system host-if-list controller-0
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| uuid | name | class | type | vlan id | ports | uses i/f | used by i/f | attributes |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 119bdb85-1e24-44ff-b527-fe8f167b0ad3 | mgmt0 | platform | vlan | 18 | [] | [u'pxeboot0'] | [] | MTU=1500 |
| 23b5e923-1e53-4e70-a975-542d8380b7f2 | pxeboot0 | platform | ethernet | None | [u'eno1'] | [] | [u'mgmt0', u'cluster0'] | MTU=1500 |
| 6a620c8e-4f7b-4f74-a9f4-2a91d3ae9756 | cluster0 | platform | vlan | 19 | [] | [u'pxeboot0'] | [] | MTU=1500 |
| d8a048fa-67ef-43ac-8166-671be93caa30 | oam0 | platform | ethernet | None | [u'eno3'] | [] | [] | MTU=1500 |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
```

- Add an OSD on controller-0 for Ceph:

```
system host-disk-list controller-0
```

```
system host-disk-list controller-0 | awk '/\dev/sdb/{print $2}' | xargs -i system host-stor-add controller-0 {}
```

```
system host-disk-list controller-0 | awk '/\dev/sdc/{print $2}' | xargs -i system host-stor-add controller-0 {}
```

```
system host-stor-list controller-0
```

```
[sysadmin@controller-0 ~]# system host-disk-list controller-0
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| uuid | device_no | device_ | device_ | size_ | available_ | rpm | serial_id | device_path |
| | de | num | type | gib | gib | | | |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 8e2a719a-fa5a-4c25-89af-70a23fb7b238 | /dev/sda | 2048 | HDD | 893. | 644.726 | Undetermined | 00c66a07604fa8de2500151b14604609 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:0:0 |
| | | | | 75 | | | |
| 61b6f262-a51f-4310-aeac-373b1c1bbbc2 | /dev/sdb | 2064 | HDD | 1117. | 1117.247 | Undetermined | 00c6b9139b76a8de2500151b14604609 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:1:0 |
| | | | | 25 | | | |
| 81a7f4f9-dd3a-49b5-80d9-e1953aa43c79 | /dev/sdc | 2080 | HDD | 1117. | 1117.247 | Undetermined | 0053be63c794a8de2500151b14604609 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:2:0 |
| | | | | 25 | | | |
| 4879b381-8e9f-48f3-84e2-f9c6a94bbfe0 | /dev/sdd | 2096 | HDD | 1117. | 0.0 | Undetermined | 0065482593bca8de2500151b14604609 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:3:0 |
| | | | | 25 | | | |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
```

```
[sysadmin@controller-0 ~(keystone_admin)]$ system host-disk-list controller-0 | awk '/\dev\|sdb/{print $2}' | xargs -i system host-stor-add controller-0 {}
+-----+-----+
| Property | Value |
+-----+-----+
| osdid | 0 |
| function | osd |
| state | configuring-on-unlock |
| journal_location | 0816c72f-a4f0-49ea-9a95-0f02c880717c |
| journal_size_gib | 1024 |
| journal_path | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:1:0-part2 |
| journal_node | /dev/sdb2 |
| uuid | 0816c72f-a4f0-49ea-9a95-0f02c880717c |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| idisk_uuid | 61b6f262-a51f-4310-aeac-373b1c1bbbc2 |
| tier_uuid | 3af8c893-9dd4-40af-afc6-30bb79048448 |
| tier_name | storage |
| created_at | 2020-11-17T01:05:04.063823+00:00 |
| updated_at | None |
+-----+-----+
[sysadmin@controller-0 ~(keystone_admin)]$ system host-disk-list controller-0 | awk '/\dev\|sdc/{print $2}' | xargs -i system host-stor-add controller-0 {}
+-----+-----+
| Property | Value |
+-----+-----+
| osdid | 1 |
| function | osd |
| state | configuring-on-unlock |
| journal_location | 7a0b3727-0e3f-4582-9415-56e44bb8f1e5 |
| journal_size_gib | 1024 |
| journal_path | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:2:0-part2 |
| journal_node | /dev/sdc2 |
| uuid | 7a0b3727-0e3f-4582-9415-56e44bb8f1e5 |
| ihost_uuid | 16afe3a2-ba50-46b8-9fd7-09010059e8b9 |
| idisk_uuid | 81a7f4f9-dd3a-49b5-80d9-e1953aa43c79 |
| tier_uuid | 3af8c893-9dd4-40af-afc6-30bb79048448 |
| tier_name | storage |
| created_at | 2020-11-17T01:05:06.939798+00:00 |
| updated_at | None |
+-----+-----+
[sysadmin@controller-0 ~(keystone_admin)]$ system host-stor-list controller-0
+-----+-----+-----+-----+-----+-----+-----+
| uuid | function | osdid | state | idisk_uuid | journal_path | journal_node | journal_size_gib | tier_name |
+-----+-----+-----+-----+-----+-----+-----+
| 0816c72f-a4f0-49ea-9a95-0f02c880717c | osd | 0 | configuring-on-unlock | 61b6f262-a51f-4310-aeac-373b1c1bbbc2 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:1:0-part2 | /dev/sdb2 | 1 | storage |
| 7a0b3727-0e3f-4582-9415-56e44bb8f1e5 | osd | 1 | configuring-on-unlock | 81a7f4f9-dd3a-49b5-80d9-e1953aa43c79 | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:2:0-part2 | /dev/sdc2 | 1 | storage |
+-----+-----+-----+-----+-----+-----+-----+
```

## 2.7 Unlock controller-0

system host-unlock controller-0

```
[sysadmin@controller-0 ~ (keystone_admin)]$ system host-unlock controller-0
+-----+-----+
| Property          | Value
+-----+-----+
| action            | none
| administrative    | locked
| availability      | online
| bm_ip             | None
| bm_type           | none
| bm_username       | None
| boot_device       | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:0:0
| capabilities      | {u'stor_function': u'monitor'}
| clock_synchronization | ntp
| config_applied    | 6aa15fb4-8cb3-494e-b94e-95f85b560f22
| config_status      | None
| config_target      | c6ae9b2d-a3c4-4751-a79e-5487ba81ed82
| console            | ttyS0,115200
| created_at         | 2020-11-17T00:28:01.983673+00:00
| hostname           | controller-0
| id                | 1
| install_output     | graphical
| install_state       | None
| install_state_info  | None
| inv_state          | inventoried
| invprovision        | provisioning
| location            | {}
| mgmt_ip            | 192.168.18.3
| mgmt_mac           | 24:6e:96:5d:0c:92
| operational         | disabled
| personality         | controller
| reserved            | False
| rootfs_device       | /dev/disk/by-path/pci-0000:86:00.0-scsi-0:2:0:0
| serialid           | None
| software_load       | 19.12
| subfunction_avail   | online
| subfunction_oper     | disabled
| subfunctions        | controller,worker,lowlatency
| task               | Unlocking
| threads            | 5
```

```

| ldo0l          | raise
| ttys_dcd      | None
| updated_at    | 2020-11-17T01:05:07.015414+00:00
| uptime         | 3496
| uuid           | 16afe3a2-ba50-46b8-9fd7-09010059e8b9
| vim_progress_status | None
+-----+

```

Controller-0 will reboot to apply configuration changes and come into service. This can take 5-10 minutes, depending on the performance of the host machine.

Once the controller comes back up, check the status of controller-0

```

source /etc/platform/openrc
system host-list

```

```

controller-0:~$ source /etc/platform/openrc
[sysadmin@controller-0 ~(keystone_admin)]$ system host-list
+-----+-----+-----+-----+-----+
| id  | hostname     | personality | administrative | operational | availability |
+-----+-----+-----+-----+-----+
| 1   | controller-0 | controller  | unlocked       | enabled      | available   |
+-----+-----+-----+-----+-----+

```

## 2 Installation for the second server (controller-1)

### 2.1 Power on the controller-1 server and force it to network boot

Boot

Power

Chat

Keyboard

Screen

## Boot Controls

---

- Normal Boot
  - PXE**
  - BIOS Setup
  - Local Floppy/Primary Removable Media
  - Local CD/DVD
  - Hard Disk Drive
  - Virtual Floppy
  - Virtual CD/DVD/ISO
  - Local SD Card
  - Lifecycle Controller
  - BIOS Boot Manager
  - UEFI Device Path
  - UEFI HTTP
- 

Cancel

Boot Power Chat Keyboard Screen Capture Refresh Full Screen Disconnect Viewer Console Controls


F2 = System Setup  
F10 = Lifecycle Controller (Config iDRAC, Update FW, Install OS)  
F11 = Boot Manager  
F12 = PXE Boot

PowerEdge R740xd  
BIOS Version: 1.6.12  
iDRAC IP: 128.224.210.65  
**PXE Boot Requested by iDRAC**



Initializing Firmware Interfaces...

**2.2 As controller-1 boots, a message appears on its console instructing you to configure the personality of the node**

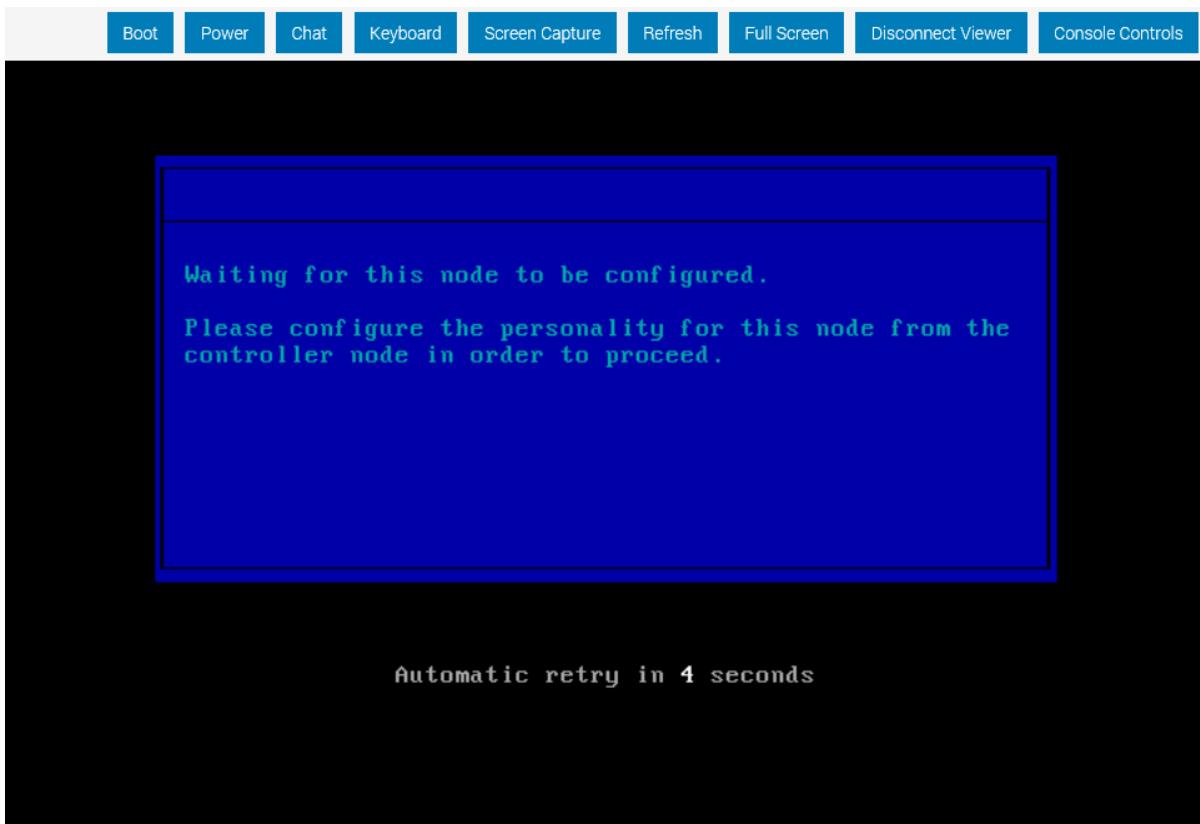

### 2.3 On the console of controller-0, list hosts to see newly discovered controller-1 host (hostname=None)

system host-list

```
[sysadmin@controller-0 ~(keystone_admin)]$ system host-list
+---+-----+-----+-----+-----+
| id | hostname | personality | administrative | operational | availability |
+---+-----+-----+-----+-----+
| 1 | controller-0 | controller | unlocked | enabled | degraded |
| 2 | None | None | locked | disabled | offline |
+---+-----+-----+-----+-----+
```

### 2.4 Using the host id, set the personality of this host to 'controller':

system host-update 2 personality=controller

[sysadmin@controller-0 ~ (keystone_admin)]\$ system host-update 2 personality=controller	
Property	Value
action	none
administrative	locked
availability	offline
bm_ip	None
bm_type	None
bm_username	None
boot_device	/dev/sda
capabilities	{}
clock_synchronization	ntp
config_applied	None
config_status	None
config_target	None
console	ttyS0,115200
created_at	2020-11-17T10:17:44.387813+00:00
hostname	controller-1
id	2
install_output	text
install_state	None
install_state_info	None
inv_state	None
invprovision	None
location	{}
mgmt_ip	192.168.18.4
mgmt_mac	24:6e:96:5d:38:ee
operational	disabled
personality	controller
reserved	False
rootfs_device	/dev/sda
serialid	None
software_load	19.12
subfunction_avail	not-installed
subfunction_oper	disabled
subfunctions	controller,worker,lowlatency
task	None
tboot	false
ttys_dcd	None
updated_at	None
uptime	0
uuid	f069381d-9743-49cc-bf8b-eb4bd3972203

```
| vim_progress_status | None  
+-----+-----+
```

**2.5 Wait for the software installation on controller-1 to complete, for controller-1 to reboot, and for controller-1 to show as locked/disabled /online in 'system host-list'.**

This can take 5-10 minutes, depending on the performance of the host machine.

```
[root@controller-0 hieradata(keystone_admin)]$ system host-list  
+-----+-----+-----+-----+-----+  
| id | hostname | personality | administrative | operational | availability |  
+-----+-----+-----+-----+-----+  
| 1 | controller-0 | controller | unlocked | enabled | available |  
| 2 | controller-1 | controller | locked | disabled | online |  
+-----+-----+-----+-----+-----+
```

## 2.6 Configure controller-1

```
OAM_IF=eno3  
MGMT_IF=eno1  
  
system host-if-modify controller-1 $OAM_IF -n oam0  
  
system host-if-modify controller-1 oam0 -c platform  
  
system interface-network-assign controller-1 oam0 oam  
  
system host-if-add -V 19 controller-1 cluster0 vlan pxeboot0  
  
system interface-network-assign controller-1 cluster0 cluster-host  
  
system host-if-list controller-1  
  
system host-disk-list controller-1  
  
system host-disk-list controller-1 | awk '/\dev\sd[bc]/ {print $2}' | xargs -i system host-stor-add controller-1 {}  
system host-disk-list controller-1 | awk '/\dev\sd[cd]/ {print $2}' | xargs -i system host-stor-add controller-1 {}  
system host-stor-list controller-1  
  
2.7 Unlock controller-1  
  
system host-unlock controller-1
```

Property	Value
action	none
administrative	locked
availability	online
bm_ip	None
bm_type	None
bm_username	None
boot_device	/dev/sda
capabilities	{u'stor_function': u'monitor'}
clock_synchronization	ntp
config_applied	None
config_status	Config out-of-date
config_target	9747e0ce-2319-409d-b75c-2475bc5065ac
console	ttyS0,115200
created_at	2020-11-22T12:58:11.630526+00:00
hostname	controller-1
id	3
install_output	text
install_state	None
install_state_info	None
inv_state	inventoried
invprovision	unprovisioned
location	{}
mgmt_ip	192.168.18.4
mgmt_mac	24:6e:96:5d:38:ee
operational	disabled
personality	controller
reserved	False
rootfs_device	/dev/sda
serialid	None
software_load	19.12
subfunction_avail	online
subfunction_oper	disabled
subfunctions	controller,worker,lowlatency
task	Unlocking
tboot	false
ttys_dcd	None
updated_at	2020-11-22T15:13:09.716324+00:00
uptime	752
uuid	63c930c7-2195-4d5a-870c-be610fd6b4fc

```
| vim_progress_status | None |
+-----+-----+
system host-list

[root@controller-0 hieradata(keystone_admin)]$ system host-list
+---+-----+-----+-----+-----+
| id | hostname | personality | administrative | operational | availability |
+---+-----+-----+-----+-----+
| 1 | controller-0 | controller | unlocked | enabled | available |
| 2 | controller-1 | controller | unlocked | enabled | available |
+---+-----+-----+-----+-----+
```

### 3 High Availability status show

sm-dump

Use the sm-dump to show the status of 2 controller, it shows that services on controller-0 are in **active** mode, and services on controller-1 are in **standby** mode.

```
[root@controller-0 ~(keystone_admin)]# sm-dump
```

-Service_Groups-----		
oam-services	active	active
controller-services	active	active
cloud-services	active	active
patching-services	active	active
directory-services	active	active
web-services	active	active
storage-services	active	active
storage-monitoring-services	active	active
vim-services	active	active
-----		
-Services-----		
oam-ip	enabled-active	enabled-active
management-ip	enabled-active	enabled-active
drbd-pg	enabled-active	enabled-active
drbd-rabbit	enabled-active	enabled-active
drbd-platform	enabled-active	enabled-active
pg-fs	enabled-active	enabled-active
rabbit-fs	enabled-active	enabled-active
nfs-mgmt	enabled-active	enabled-active
platform-fs	enabled-active	enabled-active
postgres	enabled-active	enabled-active
rabbit	enabled-active	enabled-active
platform-export-fs	enabled-active	enabled-active
platform-nfs-ip	enabled-active	enabled-active
sysinv-inv	enabled-active	enabled-active
sysinv-conductor	enabled-active	enabled-active
mtc-agent	enabled-active	enabled-active
hw-mon	enabled-active	enabled-active
dnsmasq	enabled-active	enabled-active
fm-mgr	enabled-active	enabled-active
keystone	enabled-active	enabled-active
open-ldap	enabled-active	enabled-active
snmp	enabled-active	enabled-active
lighttpd	enabled-active	enabled-active
horizon	enabled-active	enabled-active
patch-alarm-manager	enabled-active	enabled-active
mgr-restful-plugin	enabled-active	enabled-active
ceph-manager	enabled-active	enabled-active
vim	enabled-active	enabled-active
vim-api	enabled-active	enabled-active
vim-webserver	enabled-active	enabled-active
haproxy	enabled-active	enabled-active
pxeboot-ip	enabled-active	enabled-active
drbd-extension	enabled-active	enabled-active
extension-fs	enabled-active	enabled-active
extension-export-fs	enabled-active	enabled-active
etcd	enabled-active	enabled-active
drbd-etcd	enabled-active	enabled-active
etcd-fs	enabled-active	enabled-active
barbican-api	enabled-active	enabled-active
barbican-keystone-listener	enabled-active	enabled-active
barbican-worker	enabled-active	enabled-active
cluster-host-ip	enabled-active	enabled-active
docker-distribution	enabled-active	enabled-active
dockerdistribution-fs	enabled-active	enabled-active
drbd-dockerdistribution	enabled-active	enabled-active
ceph-mon	enabled-active	enabled-active
cephmon-fs	enabled-active	enabled-active
drbd-cephmon	enabled-active	enabled-active
ceph-osd	enabled-active	enabled-active
helmrepository-fs	enabled-active	enabled-active

repository-1s  
registry-token-server

enabled-active  
enabled-active

enabled-active  
enabled-active

```
controller-1:~# sm-dump
```

-Service\_Groups-----

oam-services	standby	standby
controller-services	standby	standby
cloud-services	standby	standby
patching-services	standby	standby
directory-services	active	active
web-services	active	active
storage-services	active	active
storage-monitoring-services	standby	standby
vim-services	standby	standby

-Services-----

oam-ip	enabled-standby	disabled
management-ip	enabled-standby	disabled
drbd-pg	enabled-standby	enabled-standby
drbd-rabbit	enabled-standby	enabled-standby
drbd-platform	enabled-standby	enabled-standby
pg-fs	enabled-standby	disabled
rabbit-fs	enabled-standby	disabled
nfs-mgmt	enabled-standby	disabled
platform-fs	enabled-standby	disabled
postgres	enabled-standby	disabled
rabbit	enabled-standby	disabled
platform-export-fs	enabled-standby	disabled
platform-nfs-ip	enabled-standby	disabled
sysinv-inv	enabled-standby	disabled
sysinv-conductor	enabled-standby	disabled
mtc-agent	enabled-standby	disabled
hw-mon	enabled-standby	disabled
dnsmasq	enabled-standby	disabled
fm-mgr	enabled-standby	disabled
keystone	enabled-standby	disabled
open-ldap	enabled-active	enabled-active
snmp	enabled-standby	disabled
lighttpd	enabled-active	enabled-active
horizon	enabled-active	enabled-active
patch-alarm-manager	enabled-standby	disabled
mgr-restful-plugin	enabled-active	enabled-active
ceph-manager	enabled-standby	disabled
vim	enabled-standby	disabled
vim-api	enabled-standby	disabled
vim-webserver	enabled-standby	disabled
haproxy	enabled-standby	disabled
pxeboot-ip	enabled-standby	disabled
drbd-extension	enabled-standby	enabled-standby
extension-fs	enabled-standby	disabled
extension-export-fs	enabled-standby	disabled
etcd	enabled-standby	disabled
drbd-etcd	enabled-standby	enabled-standby
etcd-fs	enabled-standby	disabled
barbican-api	enabled-standby	disabled
barbican-keystone-listener	enabled-standby	disabled
barbican-worker	enabled-standby	disabled
cluster-host-ip	enabled-standby	disabled
docker-distribution	enabled-standby	disabled
dockerdistribution-fs	enabled-standby	disabled
drbd-dockerdistribution	enabled-standby	enabled-standby
ceph-mon	enabled-standby	disabled
cephmon-fs	enabled-standby	disabled
drbd-cephmon	enabled-standby	enabled-standby
ceph-osd	enabled-active	enabled-active
helmrepository-fs	enabled-standby	disabled
registry-token-server	enabled-standby	disabled

